


Infra-red light Reflex Optic Head Type YvR26/2*03

for self-checking control device PP2028ST

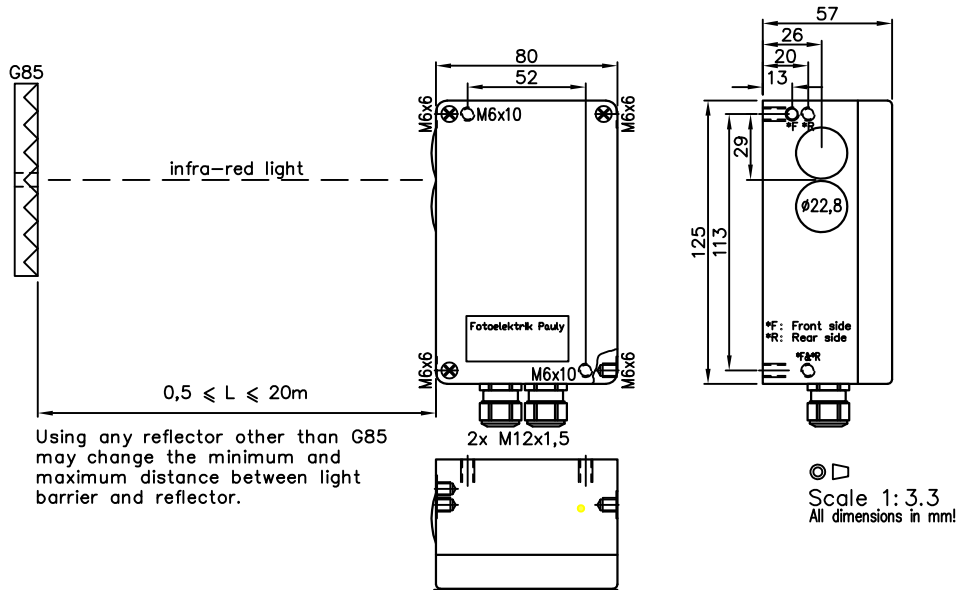

0,5...20m

Infra-red light
Reflex Optic Head
for self-checking
control device

YvR26/2*03



Order no.:

3331M03

Technical Characteristics:

Housing	Al-cast
Weight	approx. 600g
Protection mode	IP65
Connection	terminal block up to 2x40m 3-wire shielded cable, heat resistant if necessary by control unit
Supply	LED 850...880nm, invisible, rl
Transmitter light	approx. 360mm/20m
Light beam diameter	>80kLx
Steady light resistance	LED yellow
Switch indicator	-25...+100°C
Ambient temperature	

Connection:



Attention:

The shields has to be connected to the terminals in control unit and optic head!

Options:

If using cooling water flange, then milled wall, y

3331 DE M03 (24.06.05 tb)
E_3331 1 3 18.03.20 tb
(17.12.03 gs)
(18.02.05 m)

Accessories:

Control unit PP2028ST, required for operation
shielded 3-core control cable
Reflector
Adjustment flange JF26H
Heavy adjustment flange R26SH
Elbow tube adjustment AD26SS1 or AD26SS2
Cooling water flange KW26
Dust protection tube TUB75
Diaphragms, Special filters