
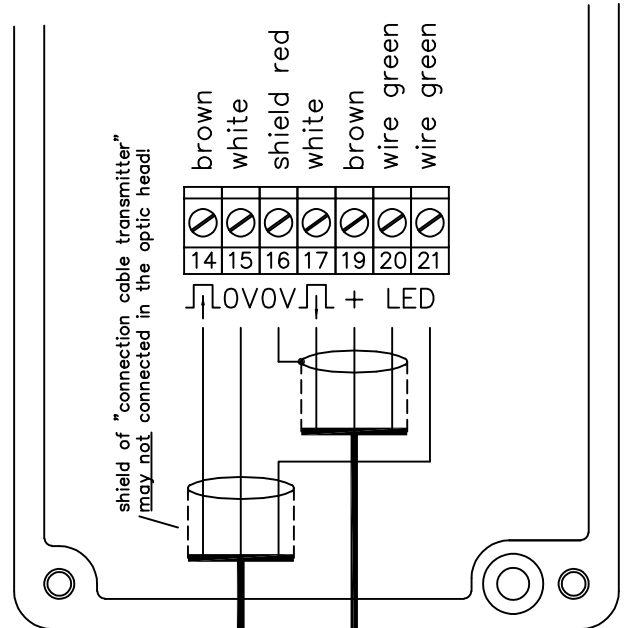


Connection Regulations for Reflex Optic Head with Driver Stage (v)

Reflex optic head


e.g. YvR26/2, YvRFZ.6, YvRFZ.2 ...

blockdiagram for reflex optics:



Control unit

e.g. PP20110-2, PV21112/2, PP20112/2 ...

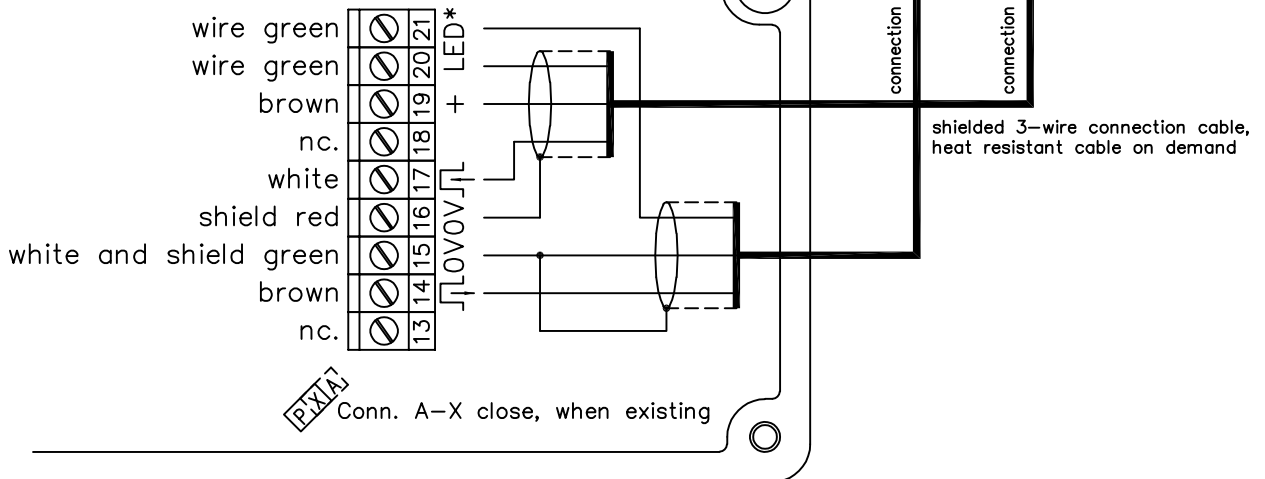

Attention:

- *Remove the bridge between terminal 20 and 21, if installed.
 - The receiver-connection-cable transmit very low signal level, so please observe the following instructions while installation:
 - Max. length of connection cable between control unit and optic head: 40m
 - connection cables may not be installed parallel to thyristor-control-cable or any other supply-cable.
 - receiver-connection-cable may not be installed parallel to transmitter-connection-cable.
- Please observe also the optic head data sheet.

(09.12.04 m.j)
18.03.20 tb

3331 HE
E_3331 28
(06.11.98 tb)
(16.07.02 tb)