



# Setting Instructions

## Optical Anti-Collision Device Type CPV1037

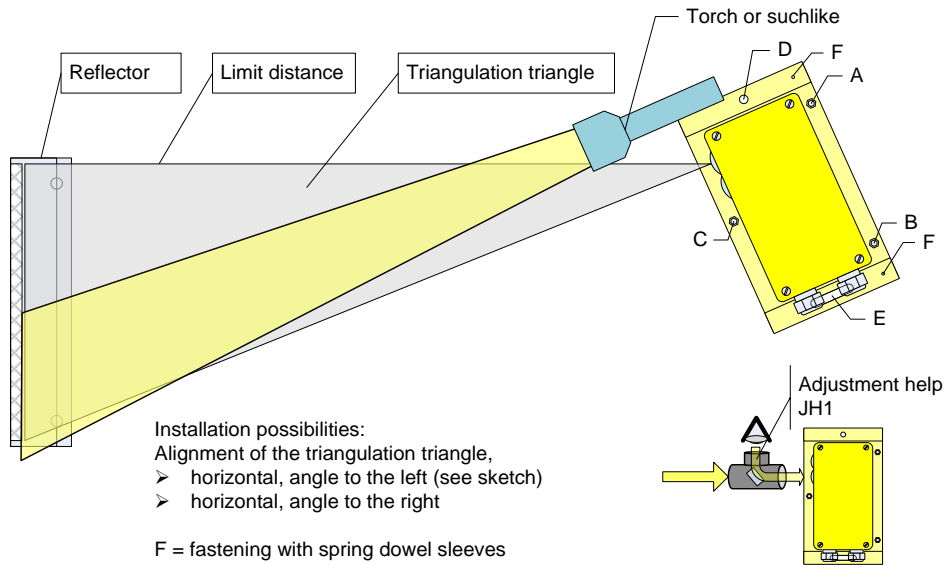


### Reflector image – Example:

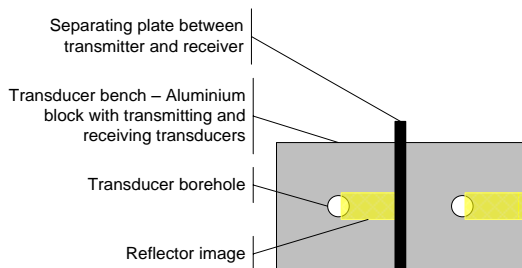


**Example:** Reflector image on the transducer bench at a limit distance for a horizontal triangulation triangle formed to the left.

**Note:** Depending on the limit distance (and reflector height), the reflector image is more or less large in comparison to the transducer boreholes! The degree to which the transducer boreholes are covered also depends on the distance. The brightness of the reflector image does not depend on the utilized lamp alone but also on the position of the lamp to the optical elements.

### Installation Example:

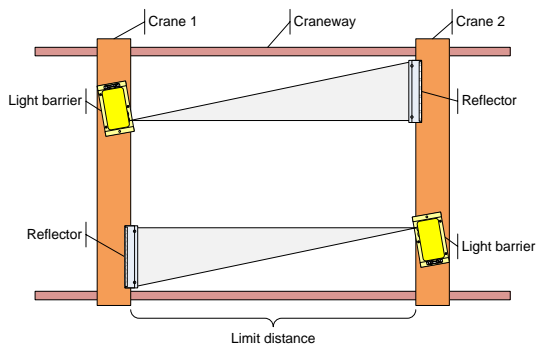


### Electrical Connection:

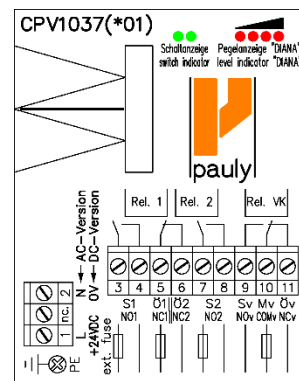

	Cl. 1	Cl. 2	PE
230VAC:	L	N	PE
115VAC:	L	N	PE
42...48VAC:	L	N	PE
24VDC:	+	0V	-/-

### Mounting the Reflector:

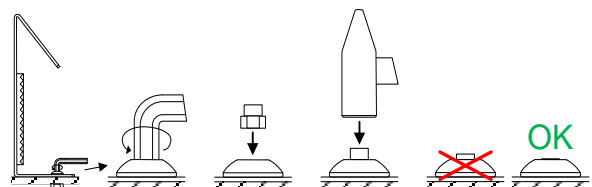

### Note on safety:

**!**

Please refer to the manual (E\_52592) for assembly, connecting and adjustment instructions of the light barrier and the corresponding accessories.

Setting instructions - Sequence

