
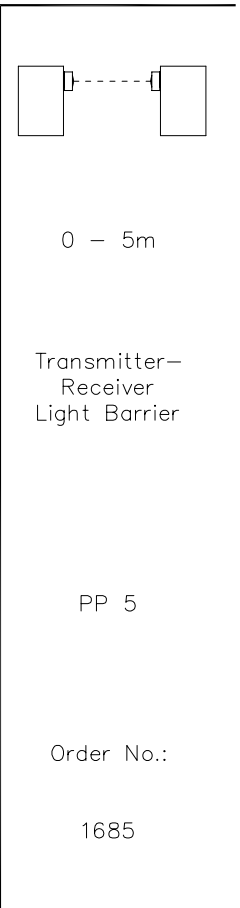


Transmitter-Receiver Light Barrier Type PP5, compact

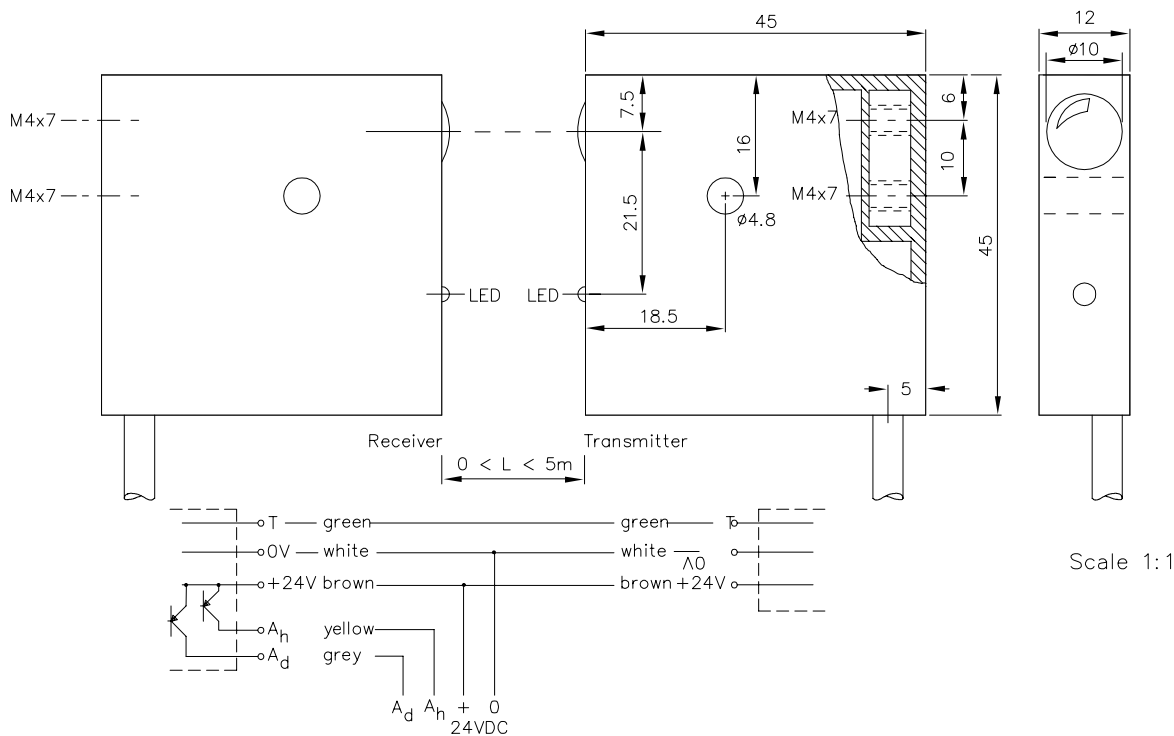

Scale 1:1

Technical Characteristics:

Housing	Luran S
Protection mode	IP 64
Weight: Receiver	approx. 50g without cable
Transmitter	approx. 25g without cable
Connection: Receiver	5-wire cable, 2m
Transmitter	3-wire cable, 2m
Power supply	24VDC/50mA
Control output	npn, antivalent, 60 mA open coll s.c. prot., e4
Transmitting light	LED 880nm, invisible
Steady light resistance	>80kLx
Interference suppression	forced synchronisation
Access time	<12ms/switching transition
Switching rate	>25/s
Switch indicator	LED
Working indicator, transmitter	LED
Ambient temperature	-25...+60°C

Special Designs:

Control output	npn, antivalent, e5
Access time	"q": <2ms/switching transition
Switching rate	"q": 300/s
Transmitting light	LED 660nm, rl

1685 D
E_1685 1
02.12.02 gs

Accessories:

diaphragms
Special filters