



Fork Light Barrier Type PP2050/20x30/5x0.2*01

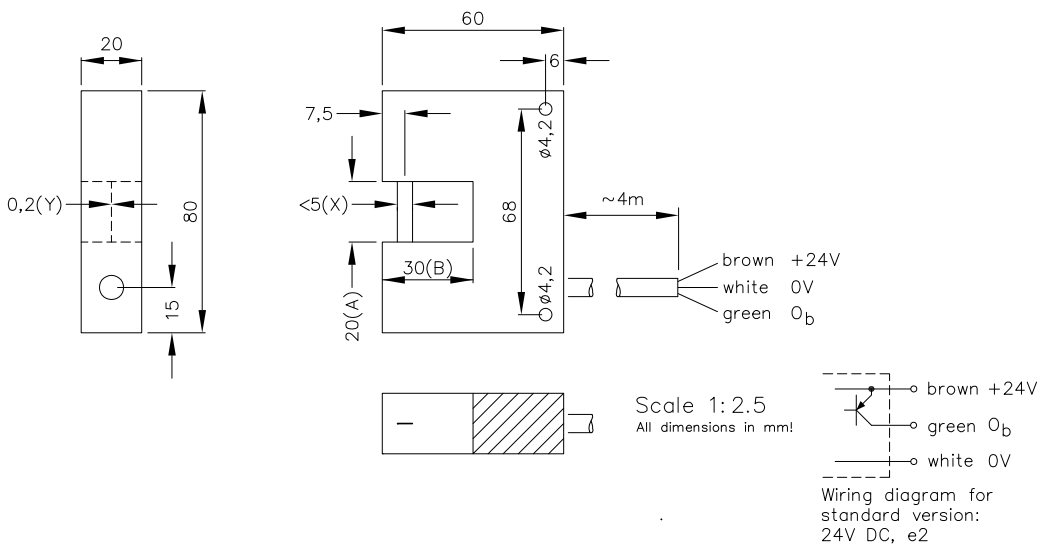

20x30mm

Fork
Light Barrier

PP2050...*01

Order No.:

3650M01

Model designation

PP2050/AxB/XxY

A=fork width

B=fork depth

X=diaphragm width in the direction of B

Y=diaphragm width vertical to X

Technical Characteristics:

Housing	Al-Cast
Weight	approx. 350g
Protection mode	IP65
Connection	3 wire cable 3x0,25mm ²
Supply	24VDC/60mA without load
Output	pnp 60mA s.-c.-prot., e2
Signal mode	brightswitching
Transmitting light	GaAs 880nm, invisible
Steady light resistance	>80kLx
Interference suppress.	Force synchronization
Photov. elem. dia. T/R	X=5, Y=0,2mm
Rise-delay time	approx. 300 ± 10µs
Fall-delay time	approx. 80 ± 10µs
Ambient temperature	-25...+60°C

Options:

Signal mode darkswitching

3650 DE M01
E 3650 1 1
(16.07.03 gs)
29.04.09 tb