PAULY

Fotoelektrik Pauly GmbH, Wahrbrink 6, 59368 Werne, Germany, Tel +49 2389 40227-70, Fax +49 2389 40227-77, www.fotoelektrik-pauly.de

(Infra-)red light Reflex Optic Head Type YvR26/2

for external control unit

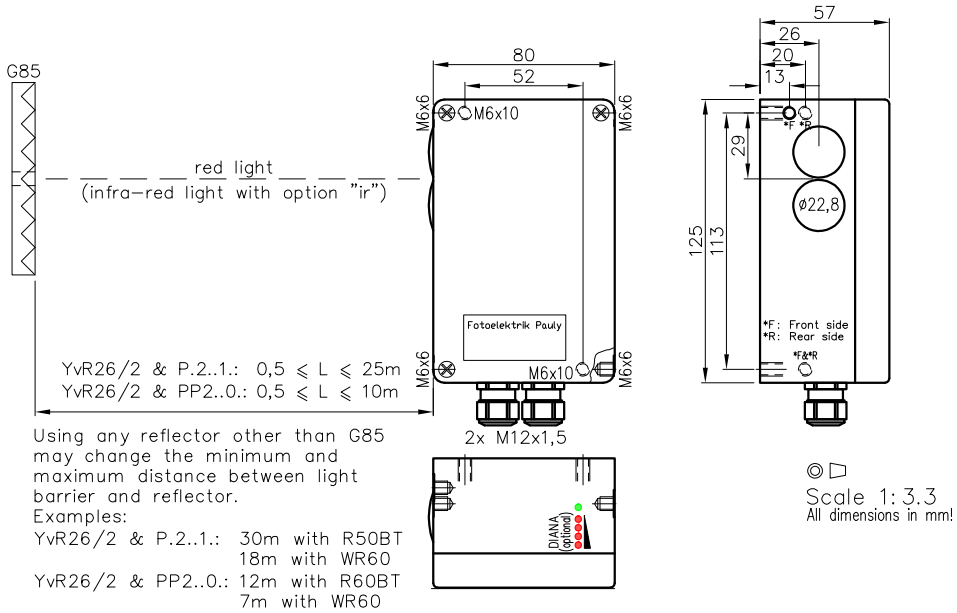

0,5...10(12)m
0,5...25(30)m

(Infra-)red light
Reflex Optic Head

YvR26/2

Order no.:

3331

Technical Characteristics:

Housing	Al-cast
Weight	approx. 600g
Protection mode	IP65
Connection	terminal block up to 2x40m 3-wire shielded cable, heat resistant if necessary
Supply	by control unit
Transmitter light	LED 650nm, visible, rl
Light beam diameter	approx. 360mm/20m
Steady light resistance	>80kLx
Switch indicator	LED
Level indicator	DIANA, ii (optional)
Ambient temperature	-25...+100°C
Range	10(12)m with control units: PP2..00-2 25(30)m with control units: PP2..10-2 or PV21112/2 in clear air

Connection:





Accessories:

Control unit, required for operation
shielded teflon control cable, heat resistant
Reflector, especially R50BT or WR...
Adjustment flange JF26H
Heavy adjustment flange R26SH
Elbow tube adjustment AD26SS1 or AD26SS2
Cooling water flange KW26 (not for dry groups)
Dust protection tube TUB75
Diaphragms, Special filters

Attention:

The shield of transmitter-cable has to be connected in the control unit but may not be connected in the optic head!
Please read the connection instructions for Reflex optic heads

Options:

Level indicator	DIANA, ii; then control unit with DIANA-Distribution i-i required
Transmitter light	LED 850...880nm, invisible, ir

If using cooling water flange, then milled wall, y

3331 DE (06.11.98 tb) (18.03.20 tb)
E_ 3331 1 (17.07.02 tb) 24.11.22 TBR
(30.07.90 rb) (10.08.04 tb)
(07.02.97 tb) (09.12.04 mj)

The design and make of the devices and their electronics are intellectual property of the company "Fotoelektrik Pauly GmbH". Internal circuit diagrams can, for copyright reasons, not be given therefore. Subject to technical alterations. Errors excepted. The reprinting of this data sheet or the copying of extracts from it are allowed only with the approval of the "Fotoelektrik Pauly GmbH" and with an indication of the sources used. Infringements are punishable by law.